


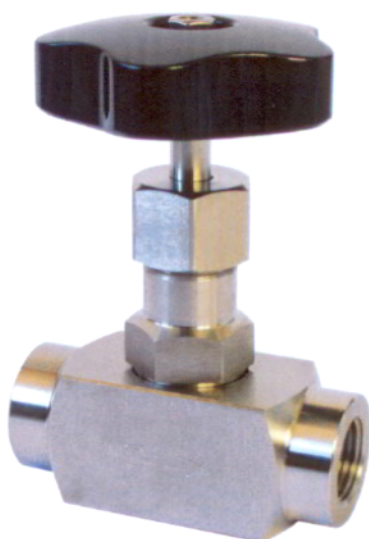

Art. 100

NEEDLE VALVE

Art. 120



NEEDLE VALVE ANGLE TYPE

Class 200 to 3000 psi
(From 3000 to 10000 ref. Art. 130)


	SIZE	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
Available from	DN	10	15	20	25	32	40	50	65	80	100

Pos	Part Name	MATERIAL SELECTION
1-3	Body/Structure	ASTM A 105 - A 105N ASTM A 182 - gr F316
2-5	Packing	PTFE • Graphite
4	Stem	ASTM A 182 - gr F316
6	Handle *	AISI 302 / Tecnopolymer

* Epoxy painted / AISI 302 or (for inox body) Tecnopolymer (type as in figure).

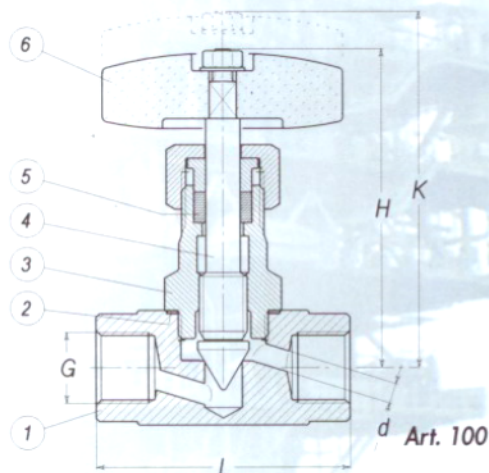

On request
moving stopper




Variant for GAS

• Maximum operating Temperature : 180°C • On request for Temperature from 180° to 250°C

G	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
DN	8	10	15	20	25	32	40	50
d	6	6	8	10	13	16	20	24
L	70	70	80	90	100	115	125	140
H	100	100	110	115	135	155	170	190
K	110	110	122	127	150	175	190	210
L1	23	27	29	35	39	50	57	64
H1	105	115	125	135	155	170	190	210
K1	120	130	140	145	160	185	210	230

G = NPT Thread

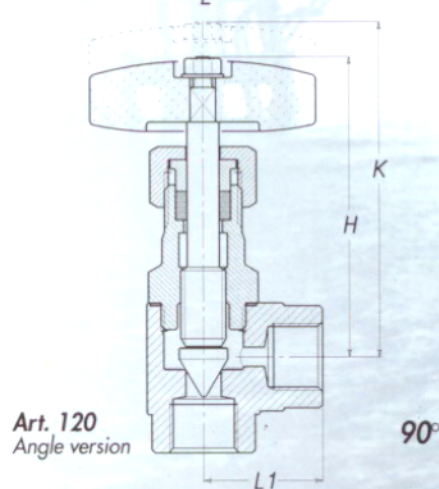

Art. 120
Angle version

90°

For further details see paragraph: **TECHNICAL INFORMATION**