




16 DIC. 2005



Art. 130

NEEDLE VALVE MONOBLOC TYPE

Class 3000 - 6000 - 10000 psi

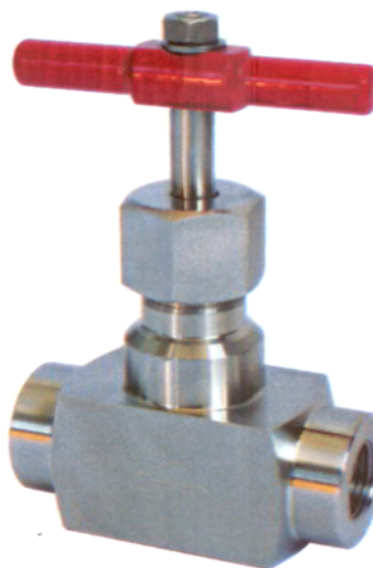

SIZE	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	2 1/2"	3"	4"
Available from DN	8	10	15	20	25	32	40	50	65	80	100

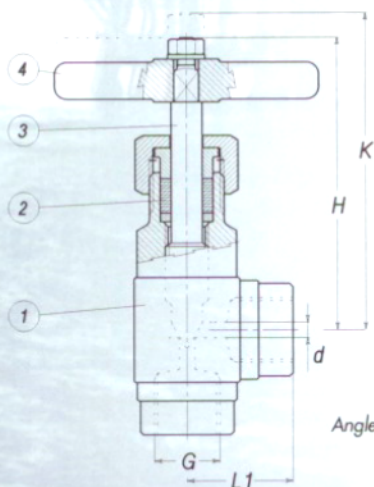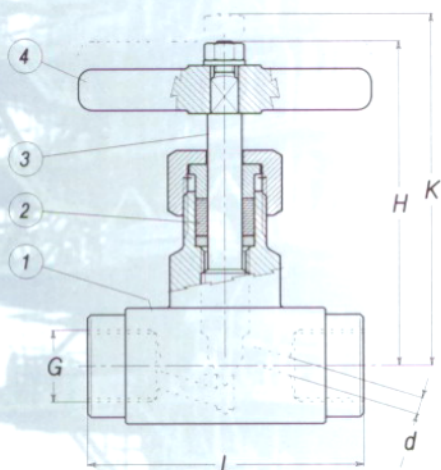

Angle version

Pos	Part Name	MATERIAL SELECTION
1	Body/Structure	ASTM A 105 - A 105N ASTM A 182 - gr F316
2	Packing	PTFE - Graphite
3	Stem	ASTM A 105 - A 105N ASTM A 182 - gr F316
4	Handle *	ASTM A 105

* Epoxy painted

G = NPT Thread

* Maximum operating Temperature : 250 °C

G	1/4"	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
DN	8	10	15	20	25	32	40	50
d	5	6	7	9	13	16	20	24
L	80	80	90	105	110	130	160	190
H	100	100	110	115	135	155	170	190
K	110	110	122	127	150	175	190	210
L1	35	35	40	45	50	60	65	70

For further details see paragraph: TECHNICAL INFORMATION