



16 DIC. 2005



Art. 040

THREE WAY TRUNNION BALL VALVE
 Class 200 to 6000 psi
 ANSI 150 - 2500
 SOFT AND METAL SEATED

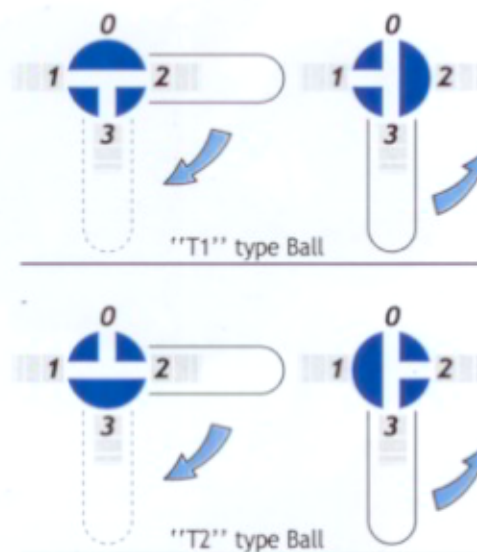
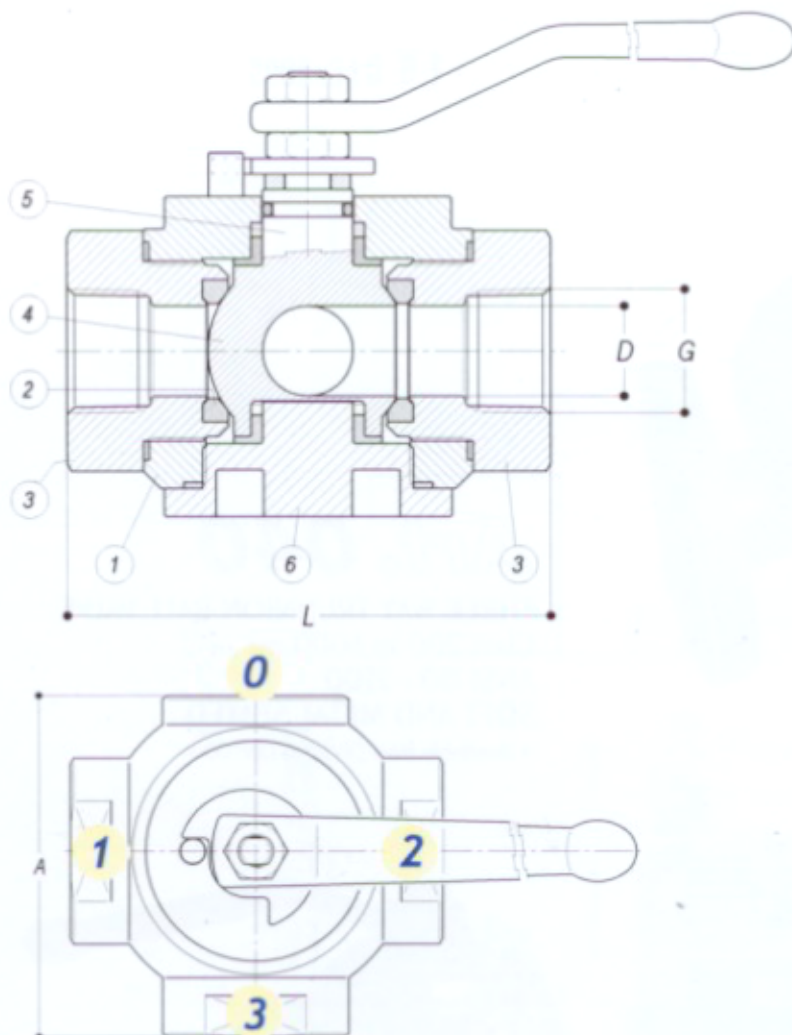
• Available from DN10 to DN100 •



FULL BORE	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	3"	4"
DN	10	15	20	25	32	40	50	80	100

**THREE WAY TRUNNION BALL VALVE****Art.
040**

SIMPLE OF A SCREWED TYPE

**ON
REQUEST**

- Option: LOCKING DEVICE
 → Option: SECURITY BLOCK
 as in figure.

	CS	LTCS	SS	22/25% Cr Duplex
Pos Part Name	Carbon Steel	Low Temperature Carbon Steel	Stainless Steel	22cr Duplex and 25Cr Super Duplex Alloys
1-3 Body/Connector	ASTM A 105 - A 105N	ASTM A 350 gr LF2	ASTM A 182 - gr F316 ASTM A 182 gr. F316L	ASTM A 182 gr. F51 ASTM A 182 gr. F53 or F55
2 Seat / Insert	R PTFE • PEEK • PCTFE • ERTALON® • DEVLON® • NYLON			
4 Ball	ASTM A 182 gr F316 / F316L ASTM A 105 - A105N + ENP ASTM A 350 gr LF2 + ENP	ASTM A 182 gr F316 / F316L ASTM A 350 gr LF2 + ENP	ASTM A 182 - gr F316 / 316L ASTM A 182 gr. F51	ASTM A 182 gr. F51 ASTM A 182 gr. F53 or F55
5 Stem	ASTM A 182 gr F316 / F316L ASTM A 182 gr F51 ASTM A 105 - A105N + ENP ASTM A 350 gr LF2 + ENP ASTM A546gr 630 (17-4-Ph) AISI 410 + ENP	ASTM A 182 gr F316 / F316L ASTM A 182 gr F51 ASTM A 350 gr LF2 + ENP ASTM A546gr 630 (17-4-Ph) AISI 410 + ENP	ASTM A 182 - gr F316 / 316L ASTM A 182 gr. F51	ASTM A 182 gr. F51 ASTM A 182 gr. F53 or F55
Fire Safe Seals	MET-MET + GRAPHITE BASED SEALS			

**MATERIAL
SELECTION**

G	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
DN	10	15	20	25	32	40	50
D	10	14	19	24	32	39	48
L	85	95	106	120	150	180	220
A	70	70	75	85	100	110	120

- FIRE SAFE SYSTEM API 607 4 th Ed
 → ANTISTATIC

For further details see paragraph: **TECHNICAL INFORMATION**